


linear dimension(Tolerances Standard GB/T 14486-2008)								—	▱	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60


REVISION RECORD				
REV.	DESCRIPTION	ECN NO.	APPROVE	DATE
A	新发行		YXW	2021.2.25

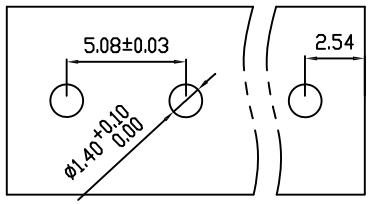


PCB LAYOUT

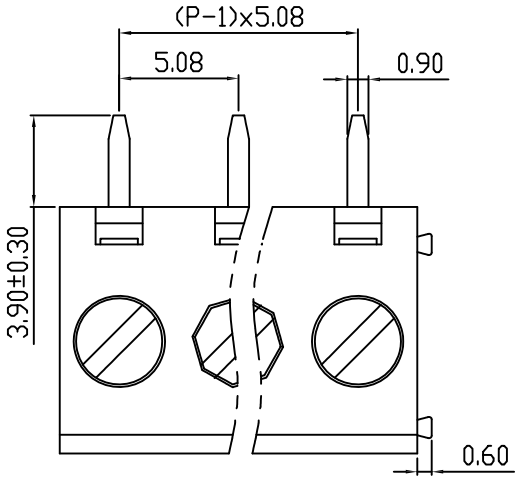

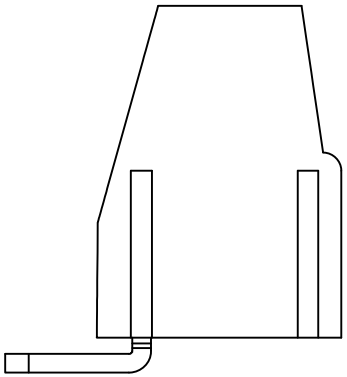

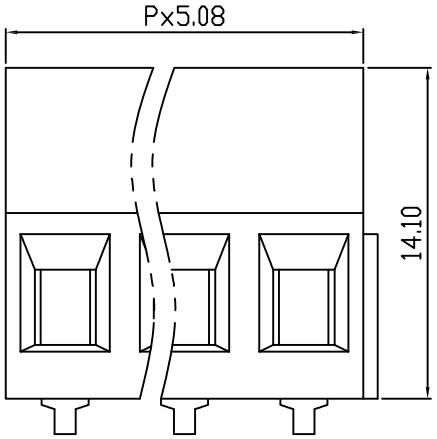

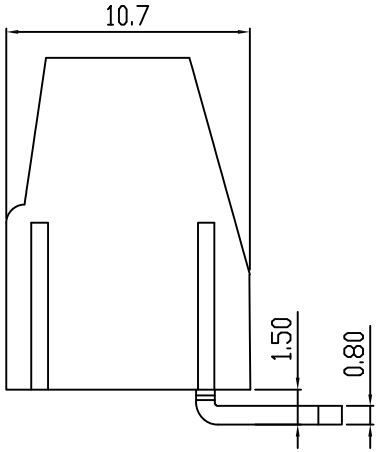

UL/CUL 技术参数 UL/CUL Technical Data				
等级 Use Group		B	C	D
额定电压 Rated Voltage	[V]	300	-	300
额定电流 Rated Current	[A]	10	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded	[AWG]	22-12		
耐电压 Withstanding Voltage		1600V/1Min		
IEC 技术参数 IEC Technical Data				
过电压类别 Overvoltage Category		III	III	II
污染等级 Contamination Class		3	2	2
额定电压 Rated Voltage	[V]	250	400	630
额定电流 Rated Current	[A]	24	24	24
额定冲击电压 Impulse withstand voltagea	[KV]	4.0	4.0	4.0
导线截面积 Conductor cross section 硬质/柔性导线 Solid/ flexible	[mm²]	2.5		
材料 Material				
绝缘材料 Insulation Material		PA66		
阻燃等级 Imflammability		UL94V-0		
导体材料 Contactor Material		铜合金 Copper alloy		
导体表面镀层 Contactive Coating		镀锡 Tin Plated		
一般参数 Other Data				
间距 Pitch	[mm]	5.08		
极数 Poles	[P]	2-24		
剥线长度 Stripping Length	[mm]	6-7		
螺丝 Screw/扭矩 Torque(Max)	[N.m]	M2.5/0.4		
工作温度 Operating temperatur	[℃]	-40~+105		
引针尺寸 Pin Dimensions	[mm]	3.9		
PCB板孔径 PCB Hole Diameter	[mm]	1.4		

DES.	CLB	DATE	2021.2.25	单位/UNITS	MM	时间/SIZE	A4	比例/SCALE	1:1	第三视角/THIRDANGLEPROJECTION	版本/REV	A
CHK.	LF	DATE	2021.2.25	宁波市旭骋电子有限公司 NINGBOSHI XUCHENG ELECTRONIC CO.,LTD						名称/TITLE	XC128R-5.08	
APP.	YXW	DATE	2021.2.25									